




OCTOPODA[®]

INTERNAL
SPINAL
FIXATION
SYSTEM



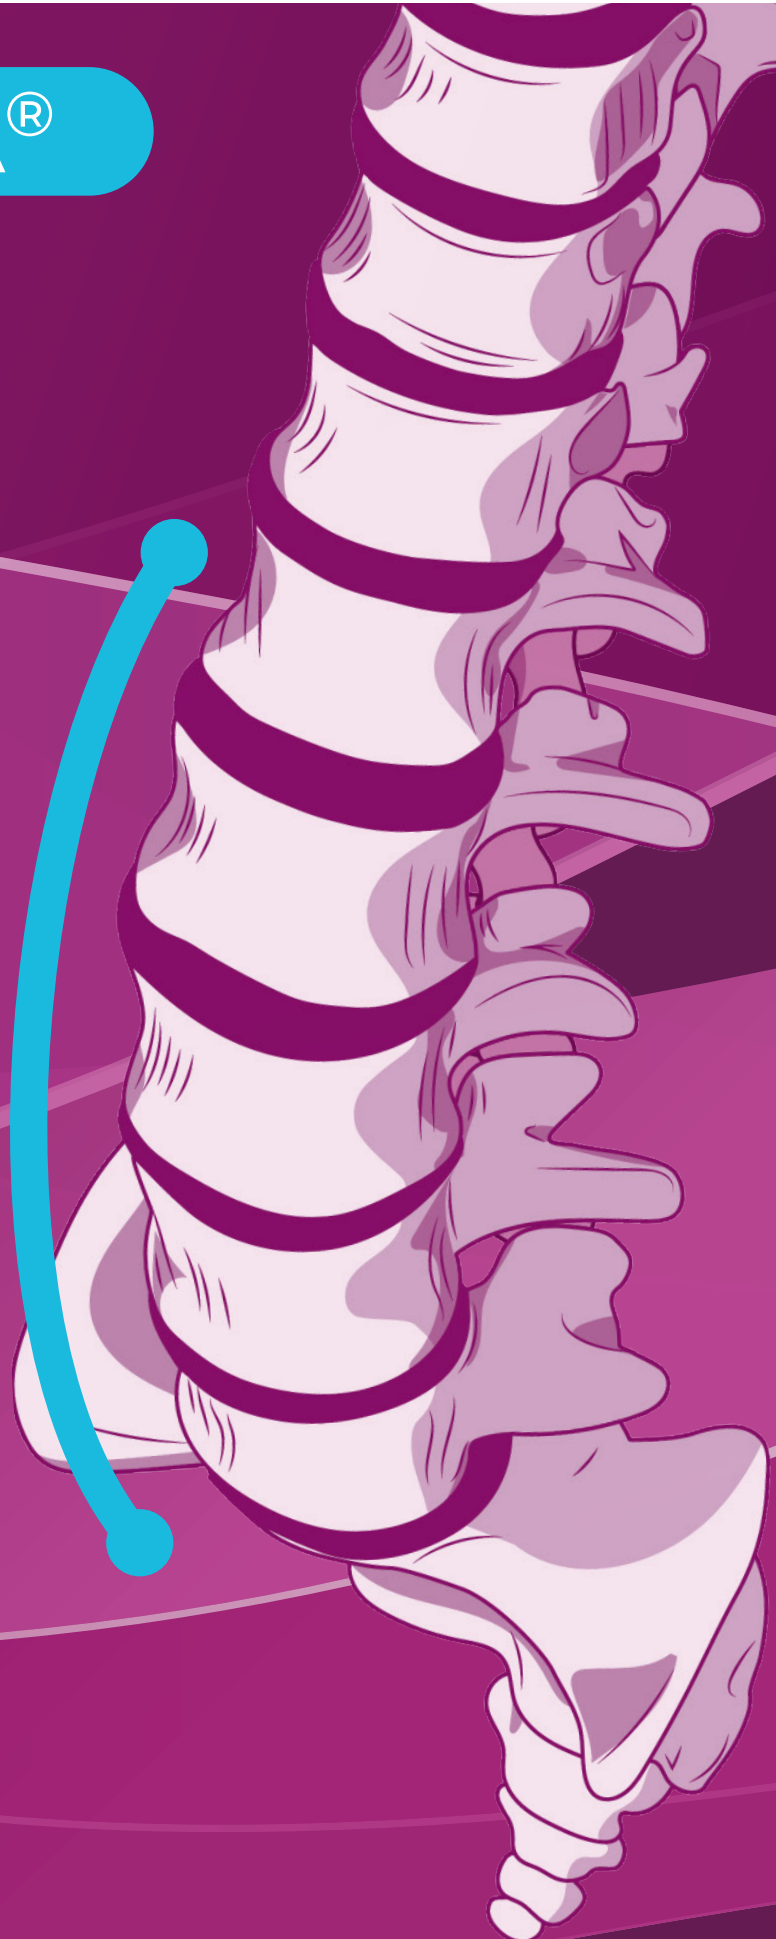









OCTOPODA® FEATURES

The OCTOPODA® system is a dorsal double rod fixator for thoracolumbar stabilization of the spine.

FEATURES:

-  8 Screw diameter in up to 12 lengths
-  Ultra-Low profile of tulip
-  60° conical angulation of polyaxial screws (30° in each direction)
-  Self-breaking Set-Screw with patented* design to avoid sharp edges
-  Dual Core / Double Lead thread to securely anchor the screw in cortical and cancellous bone
-  For fast and controlled insertion, increased pull-out resistance due to enhanced bone preservation

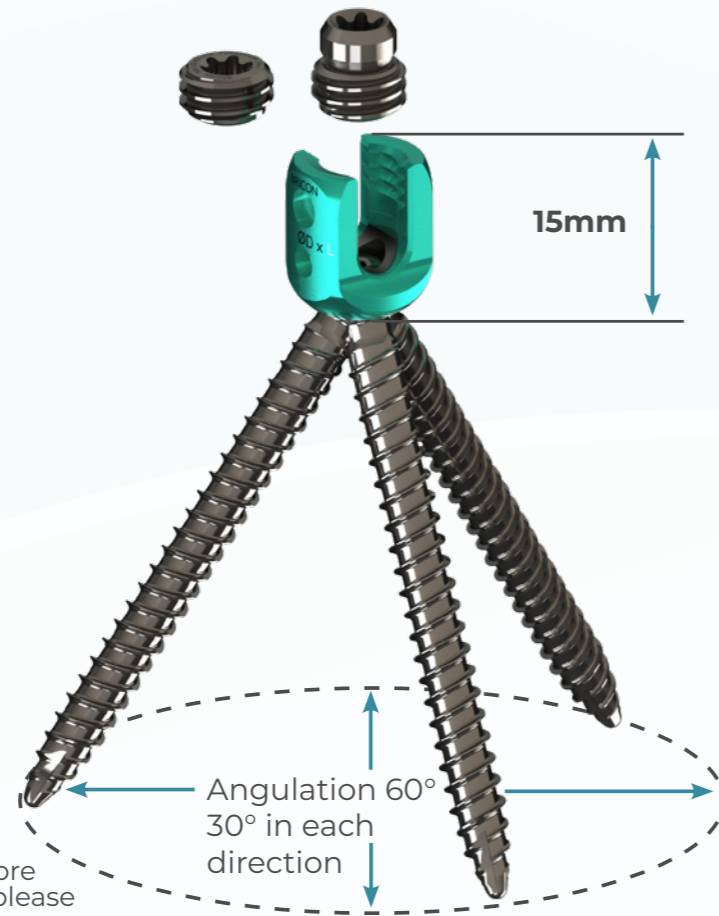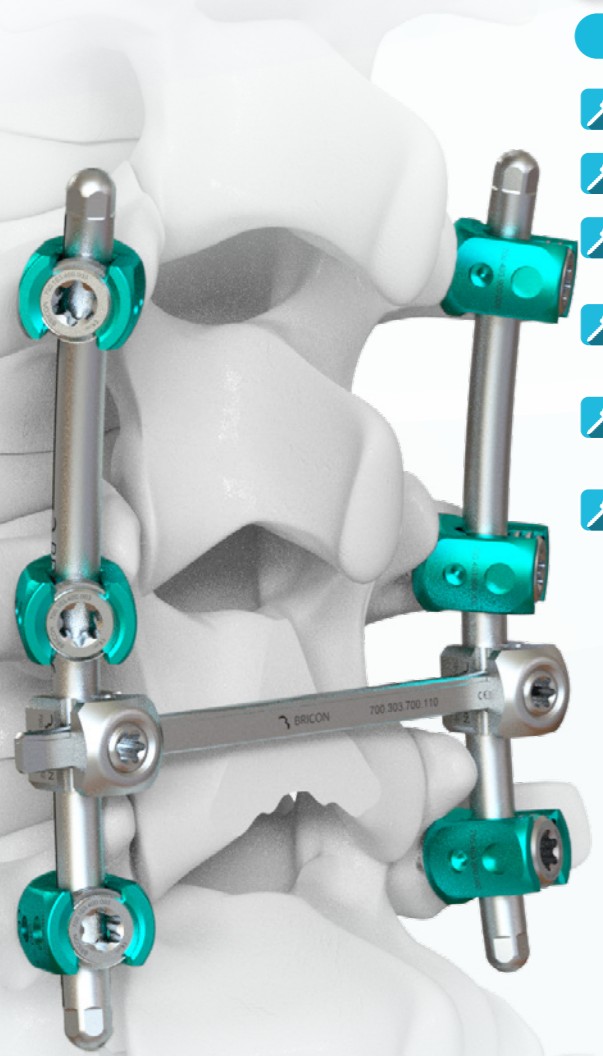


(*) The patent has regional validity. For more information on the scope of application, please contact our sales team



OCTOPODA® IMPLANTS

ARTICLE NUMBER STANDARD	DESCRIPTION	Ø	LENGHT	ARTICLE NUMBER SPONDY
700.403.940.0XX	Polyaxial Screw	4,0	20-45	700.423.640.0XX
700.403.945.0XX	Polyaxial Screw	4,5	30-50	700.423.645.0XX
700.403.950.0XX	Polyaxial Screw	5,0	30-55	700.423.650.0XX
700.403.955.0XX	Polyaxial Screw	5,5	30-55	700.423.655.0XX
700.403.960.0XX	Polyaxial Screw	6,0	30-55	700.423.660.0XX
700.403.965.0XX	Polyaxial Screw	6,5	30-55	700.423.665.0XX
700.403.970.0XX	Polyaxial Screw	7,0	30-75	700.423.670.0XX
700.403.975.0XX	Polyaxial Screw	7,5	30-75	700.423.675.0XX
700.206.640.0XX	Monoaxial Screw	4,0	20-45	700.703.640.0XX
700.206.645.0XX	Monoaxial Screw	4,5	30-50	700.703.645.0XX
700.206.650.0XX	Monoaxial Screw	5,0	30-55	700.703.650.0XX
700.206.655.0XX	Monoaxial Screw	5,5	30-55	700.703.655.0XX
700.206.660.0XX	Monoaxial Screw	6,0	30-55	700.703.660.0XX
700.206.665.0XX	Monoaxial Screw	6,5	30-55	700.703.665.0XX
700.206.670.0XX	Monoaxial Screw	7,0	30-75	700.703.670.0XX
700.206.675.0XX	Monoaxial Screw	7,5	30-75	700.703.675.0XX

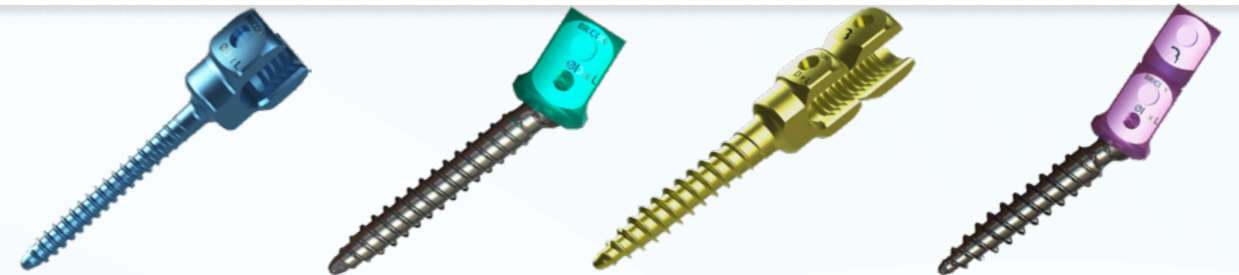

ARTICLE NUMBER	DESCRIPTION	Ø	Ø	LENGHT
700.503.700.XXX	Rod, straight	5,5	-	040-400
700.103.400.003	Set-Screw	9	-	5,0
700.103.400.004	Self-Breaking Set-Screw	9	-	9,2
700.103.700.102	Cross Connector Bar	-	-	-
700.303.700.102	Cross Connector Bar	-	-	31-41
700.303.700.104	Cross Connector Bar	-	-	38-48
700.303.700.106	Cross Connector Bar	-	-	48-58
700.303.700.108	Cross Connector Bar	-	-	63-73
700.303.700.110	Cross Connector Bar	-	-	73-83
700.703.700.102	Transversal Connector Block, (4 holes)	3,7	5,7	
700.703.700.104	Transversal Connector Block, (4 holes)	5,7	5,7	
700.803.700.102	Transversal Connector Block, (2 holes)	3,7	5,7	
700.803.700.104	Transversal Connector Block, (2 holes)	5,7	5,7	
700.903.700.102	Transver. Connector Block, Rod to Rod (4 holes)	5,7	5,7	
700.903.700.104	Transver. Connector Block, Rod to Rod (4 holes)	5,7	3,7	



OCTOPODA®

MORE INFORMATION

INSTRUMENTS

ROD REDUCER

- More than 30 mm reduction
- Secure lock
- Easy to clean



COMPATIBLE SYSTEMS

POSTERIOR OR TRANSFORAMINAL LUMBAR INTERBODY FUSION (PLIF CAGES) (TLIF CAGES)

- BASIC CAGE® PLIF
- PINA® Trochilus TLIF
- PINA® Expandus PLIF
- PINA® Plintus PLIF

Further Information at
info@bricon.com
and
+49 (0) 7461 9336-0

BRICON

Bricon GmbH
Eisenbahnstrasse 100
78573 Wurmlingen
Germany

+49 7461 9336 - 0
info@bricon.com
bricon.com



[https://bricon.com/
produkte/wirbelsaeule/](https://bricon.com/produkte/wirbelsaeule/)

CE 0482